



Tank Side Profile

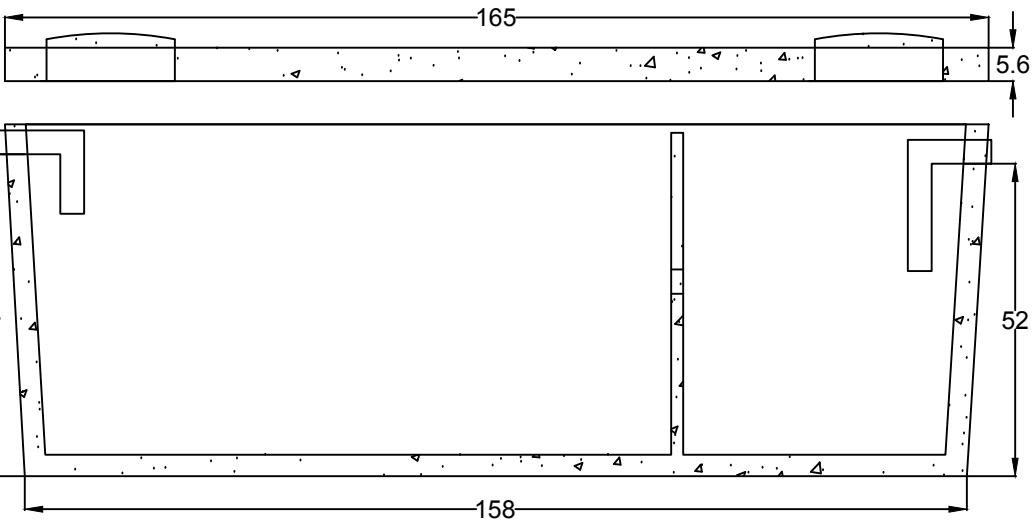

Tank End Profile

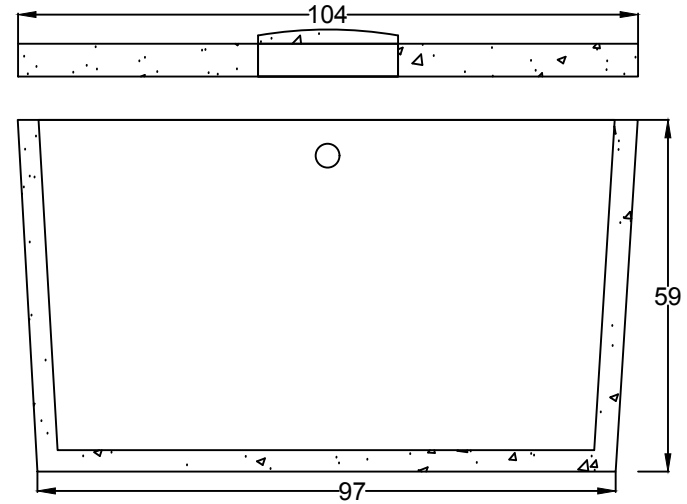

Notes:

1. Concrete Strength 32 MPa @ 28 days
2. Concrete contains MacMatrix 2" Fibers
3. Lid Sealed with Conseal CS-665
4. 2 - 24" Polylok Lids
5. Includes Polylok PL 122 Effluent Filter
6. Tank Weight: 15,400 LBS
7. Lid Weight: 6920 LBS

**DAN'S**  
*Pre-Cast*  
**LTD.**

6100 Scott Rd.  
Duncan, B.C.  
250-746-7400  
[www.dansprecast.com](http://www.dansprecast.com)

**2500 IMP. GAL. 2 COMP.**  
**(11,365 LITRES)**

Gals/inch 1st Chamber: 36.69 2nd Chamber: 14.86

DATE: NOVEMBER 11, 2018

DRAWN BY:

EJG