


Notes:


1. Concrete strength 32 MPa @ 28 days
2. Concrete contains MacMatrix 2" Fibers
3. Lid Sealed with Conseal CS-665
4. 24" Polylok Lid
5. 4" Inlet Boot, 2" Closed End Outlet boot
6. Tank Weight: 4,200 LBS
7. Lid Weight: 1,100 LBS

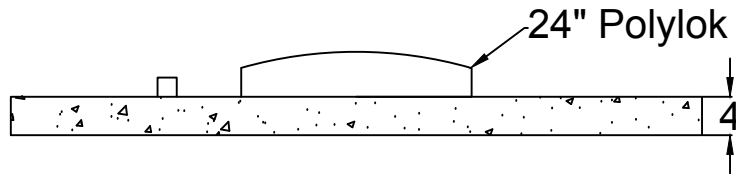

24" Polylok

4

4" Rubber Boot

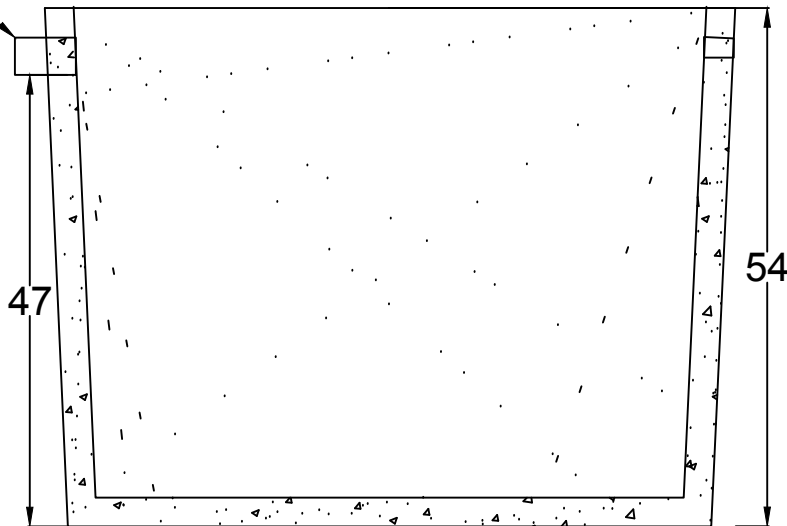

47

54

DAN'S
Pre-Cast
LTD.

6100 Scott Rd.
Duncan, B.C.
250-746-7400
www.dansprecast.com

450 IMP. GAL PUMP CHAMBER.
(2046 LITRES)

Gals/inch: 10.34

DATE: JANUARY 28, 2017

DRAWN BY:

EJG