
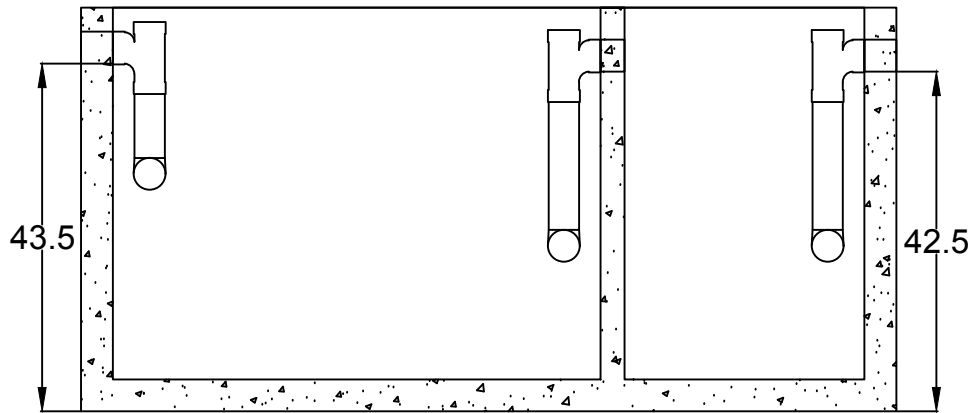


Notes:

1. Concrete Strength 32 MPa @ 28 days
2. Concrete contains MacMatrix 2" Fibers
3. Lid Sealed with Conseal CS-665
4. 1 - 20" Polylok over Inlet, 1 - 24" Polylok over Outlet
5. Tank Weight: 8,500 LBS
6. Lid Weight: 3,185 LBS



DAN'S
Pre-Cast
LTD.

6100 Scott Rd.
Duncan, B.C.
250-746-7400
www.dansprecast.com

**1000 IMP. GAL. PUMP STYLE
(4546 LITRES)**

Gals/inch 1st Chamber: 16.42 2nd Chamber: 8.57

DATE: SEPTEMBER 11, 2018

DRAWN BY:

EJG